





DO NOT GLUE THE STRIP INTO
THE CIRCULAR JIG PLATE. THIS
IS ONLY TO ENSURE CORRECT
ALIGNMENT AND IS REMOVED
WHEN THE GLUE DRIES.










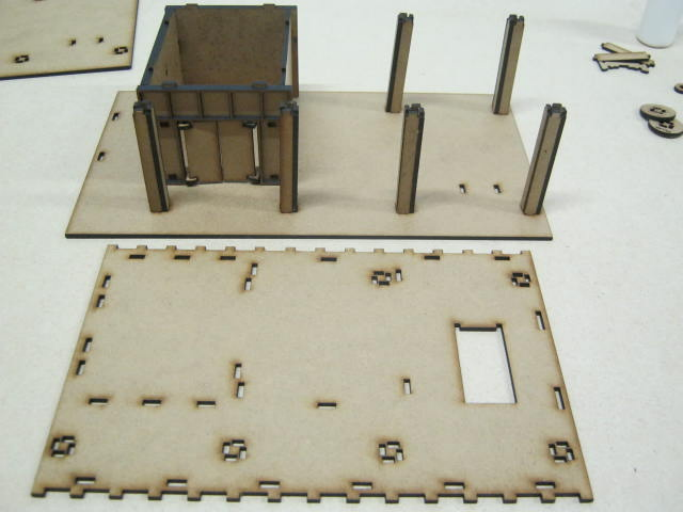



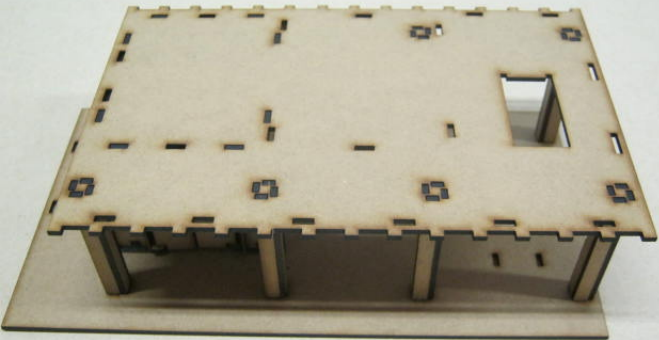


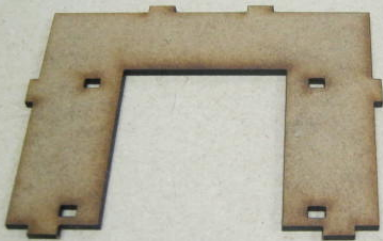








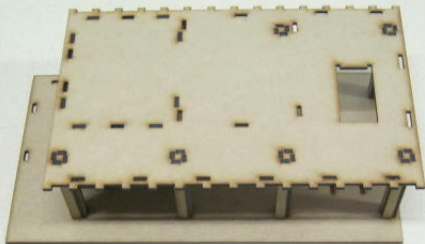

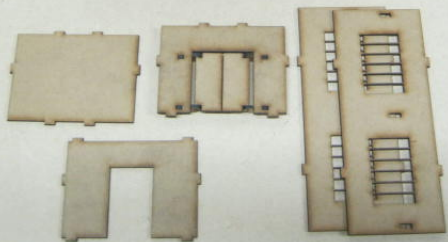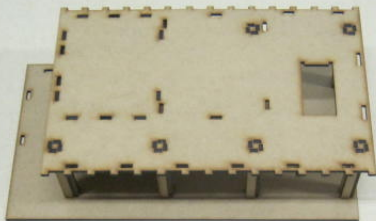

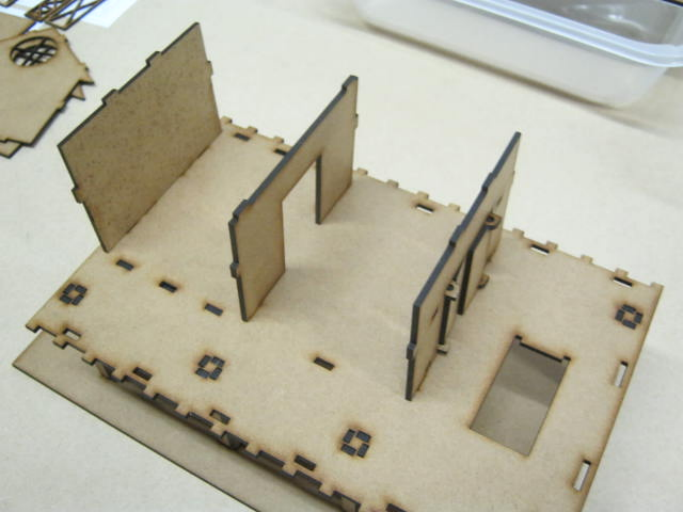









THIS DOOR IS SLIGHTLY WIDER THAN THE OTHER 4, CAREFUL NOT TO MIX THEM UP







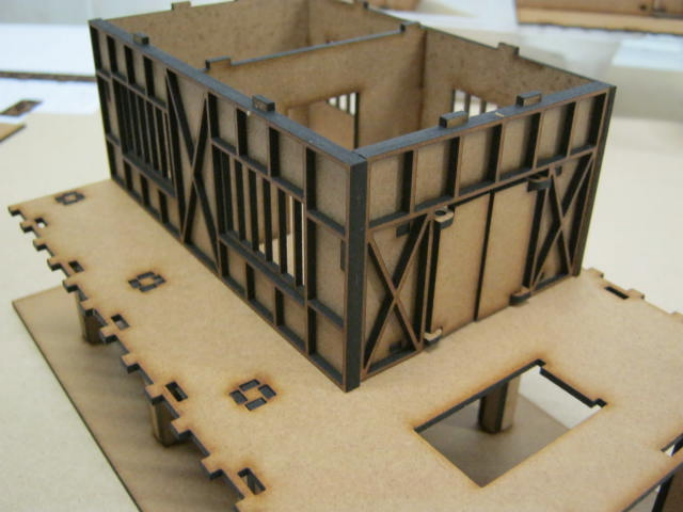


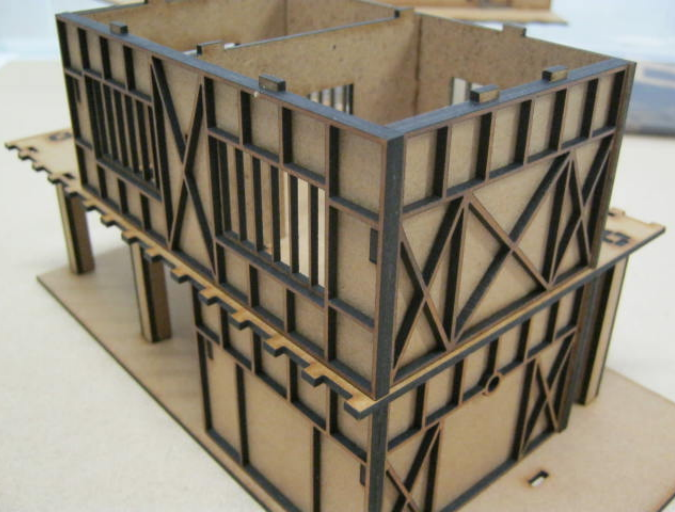












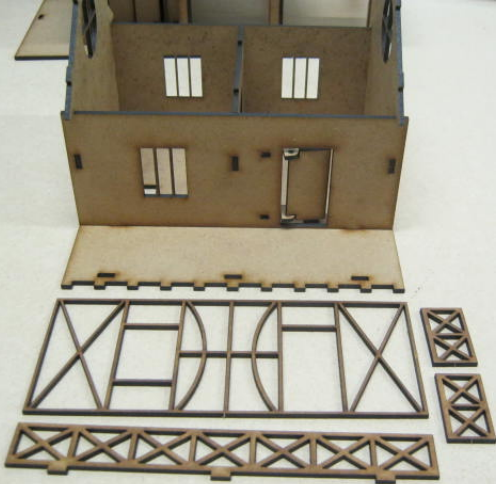







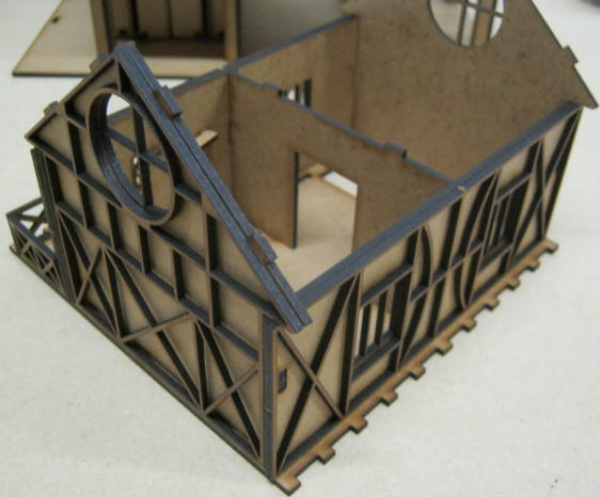


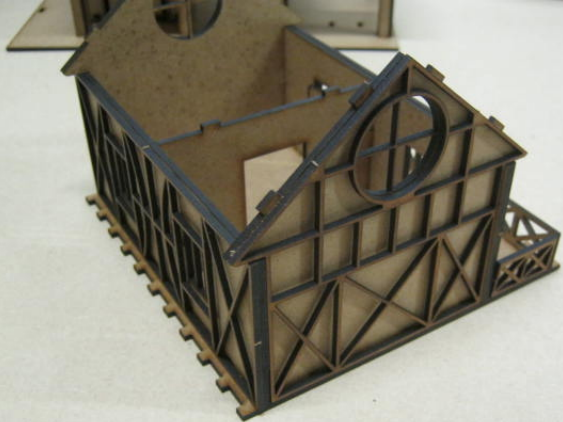

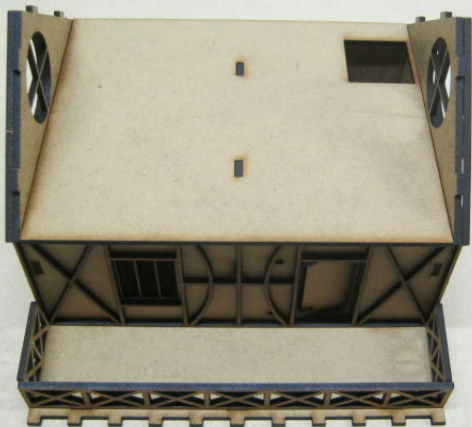



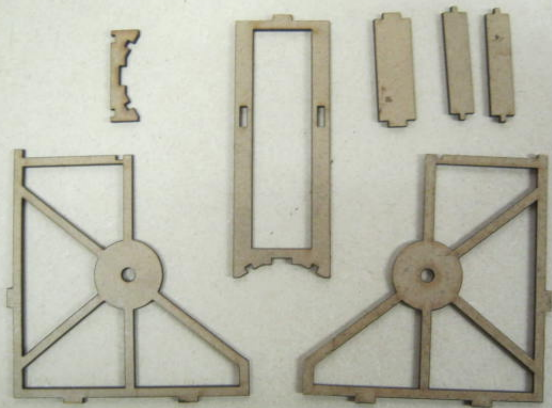

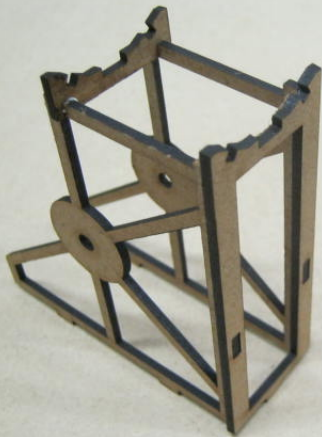












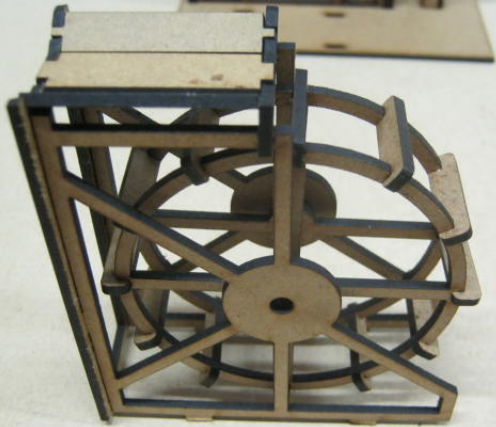

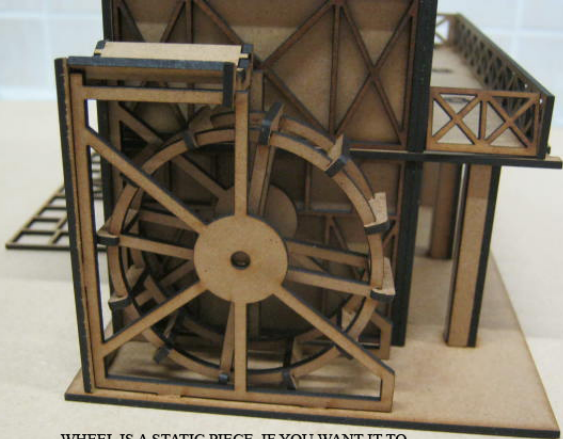

WHEEL IS A STATIC PIECE. IF YOU WANT IT TO ROTATE, YOU MAY NEED TO LIGHTLY SAND THE EDGES OF THE PADDLES FOR MORE CLEARANCE AND FIT A 3MM DIAMETER ROD THROUGH THE WHEEL AND INTO THE BUILDING

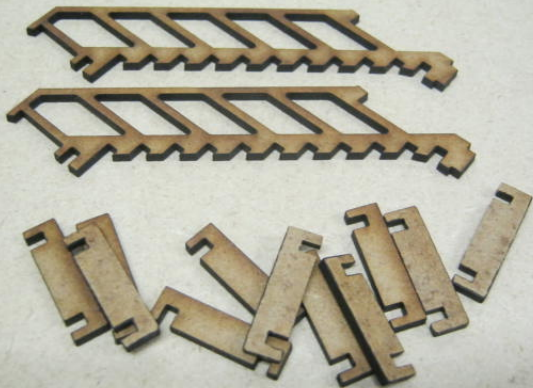








PUSH STAIRS FORWARD UNTIL
THE TWO LUGS LOCK INTO PLACE



FIT STAIRS INTO POSITION FROM BELOW

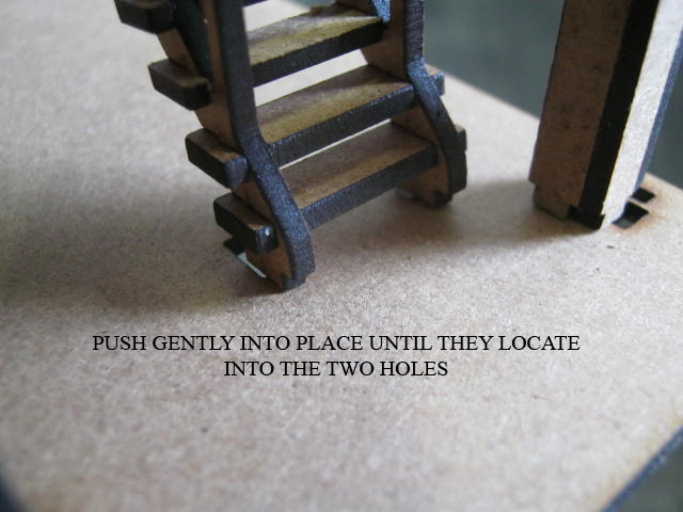

PUSH GENTLY INTO PLACE UNTIL THEY LOCATE
INTO THE TWO HOLES



STAIRS LOCATED PROPERLY